

FEEDERTRONIK

FOLDING CARTONS SERIALIZATION




FeederTronik is a **friction feeder for sheets, cards, cases and coupons** up to a maximum size of 250x300 mm in the 250 version or 400x300 mm in the 400 version. Thanks to its powerful stepper motor, it can reach a feed speed up to 70 metres/minute.

FeederTronik is equipped with an HP inkjet marker for variable data such as date, time, barcodes and texts up to a maximum height of 12.7 mm at a 600 dpi resolution.



Technical features	FEEDERTRONIK 250	FEEDERTRONIK 400
Product width	min. 60 - max. 250 mm	min. 60 - max. 400 mm
Product length	min. 60 - max. 300 mm	min. 60 - max. 300 mm
Product thickness	0.2-10 mm	0.2-10 mm
Feeding speed	max. 70 metres/min	max. 30 metres/min
Drive	stepper motor	stepper motor
Power supply	230 Vac - 50 Hz	230 Vac - 50 Hz
Power consumption	300 W	300 W
Dimensions	891 x 413 x 490 (H)	891 x 563 x 490 (H)
Weight	35 Kg	40 Kg

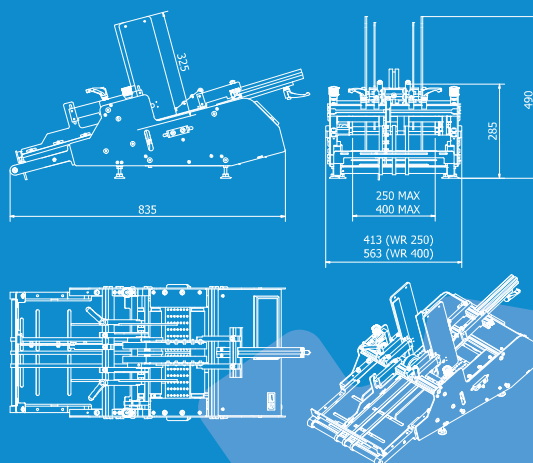

FUNCTIONALITIES:

- Dynamic carton marking.
- Printing Data Matrix and human readable elements according to EU requirements for serialization.

Pharmatronik s.r.l.

Registered office: Via Corridoni, 11 - 20122 Milano (MI) • Main office: Via Restelli, 3/7 - 20124 Milano (MI) • +39 02 25062420 • P.I. 10356130962 • info@pharmatronik.com • www.pharmatronik.com